This manual comes from the Siel Synthesizers website.

If you found this manual somewere else, please take a look at:

http://home.tiscali.nl/~smeyer/siel

Sander Meyer
smeyer@tiscali.nl
smeyer@worldonline.nl

SIEL SpA RESERVES THE RIGHT TO IMPROVE AND ALTER,
WITHOUT PRIOR NOTICE,
THE FEATURES OF THE INSTRUMENT

UPDATED OCTOBER 1983

SOCIETÀ INDUSTRIE ELETTRONICHE s.p.a.

VIA L. DA VINCI n. 11 (Zona Ind.) - **63030 ACQUAVIVA PICENA (AP)** ITALY
P.O. box 199 - 63039 SAN BENEDETTO DEL TRONTO (AP) ITALY
Tel. 0735/60744 (4 lines) - Telex 573287 SIEL
Codice Fiscale e Partita I.V.A. 00092010677
Posizione meccanografica M/790532

OPERA 6

DYNAMIC PROGRAMMABLE SYNTHESIZER

DK 600

SCHEMATIC DIAGRAM

CABLE MAP

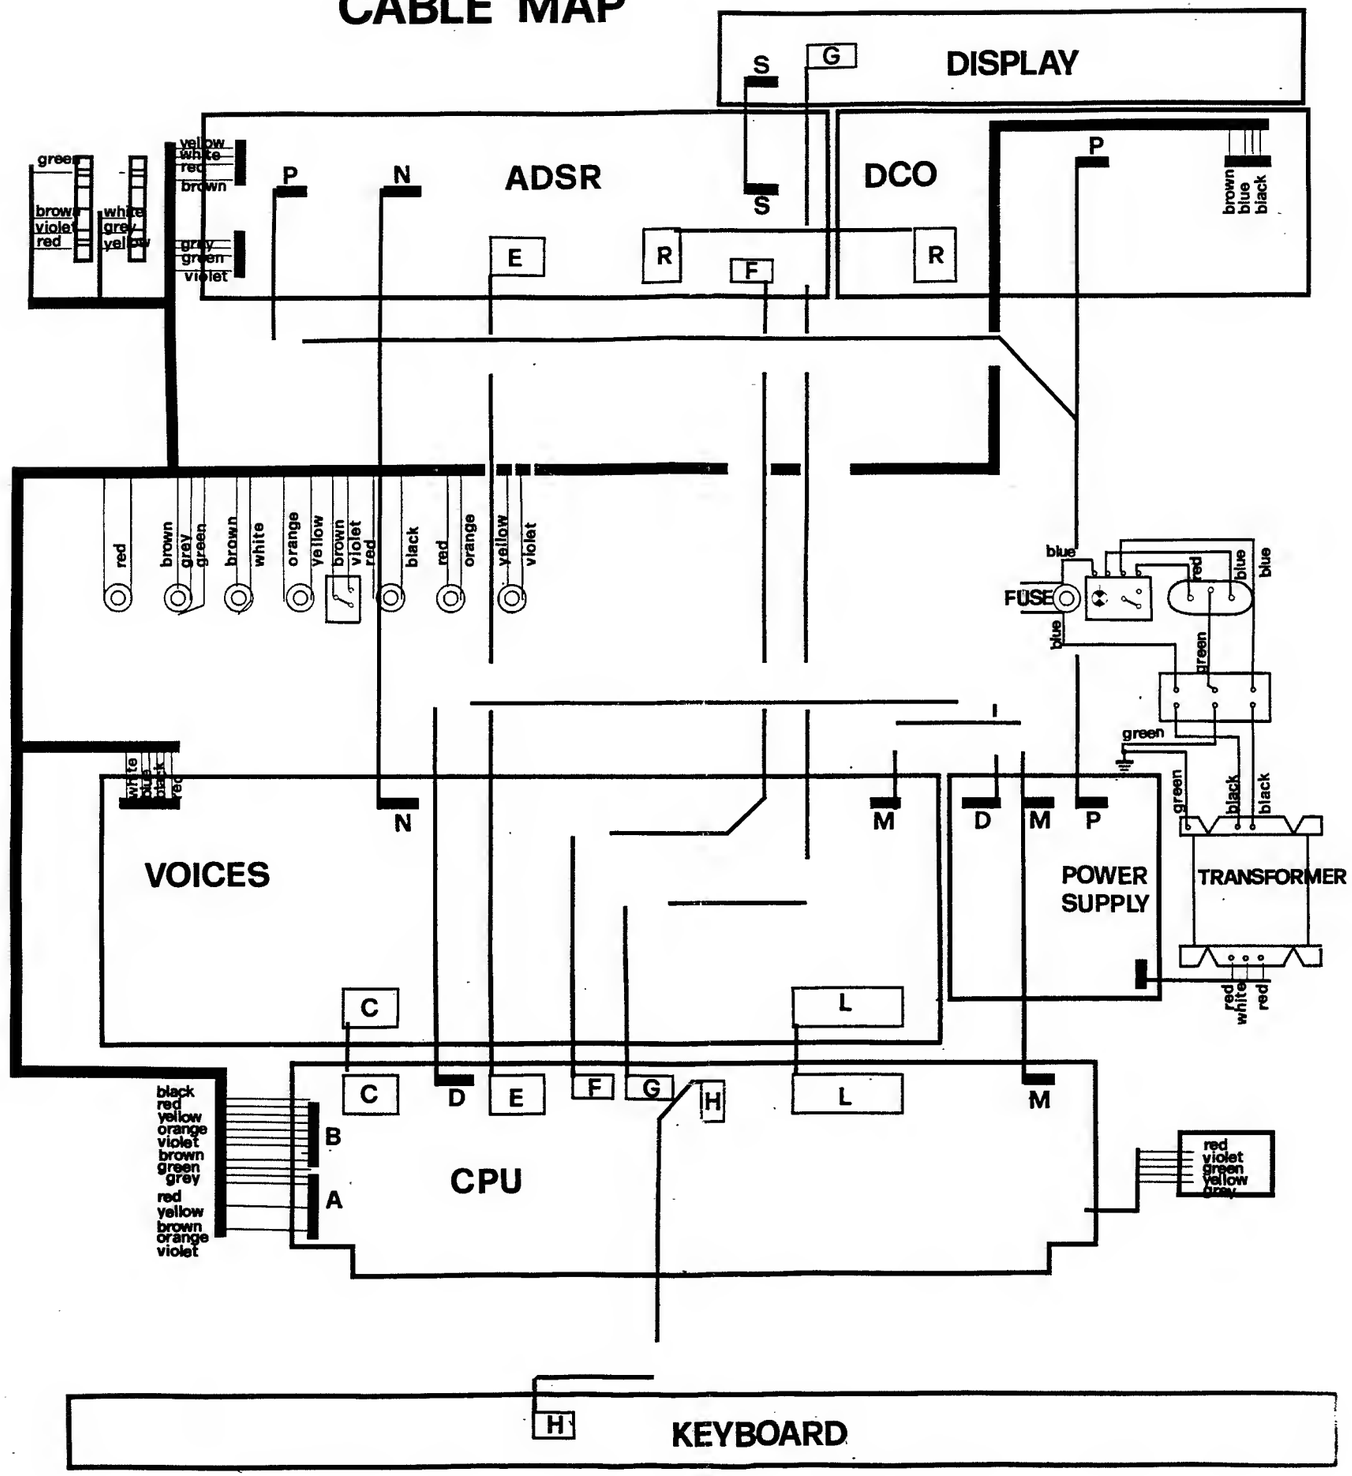
DISPLAY
S
G
S
ADSR
P
N
E
R
F
DCO
R
P
green
brown
violet
red
white
grey
yellow
yellow
white
red
brown
grey
green
violet
brown
blue
black
red
brown
grey
green
brown
white
orange
yellow
brown
violet
red
black
red
orange
yellow
violet
blue
FUSE
blue
red
blue
blue
green
green
black
black
white
blue
black
red
N
M
D
M
P
VOICES
POWER
SUPPLY
TRANSFORMER
red
white
red
C
L
C
D
E
F
G
H
L
M
black
red
yellow
orange
violet
brown
green
grey
red
yellow
brown
orange
violet
B
A
CPU
red
violet
green
yellow
grey
H
KEYBOARD

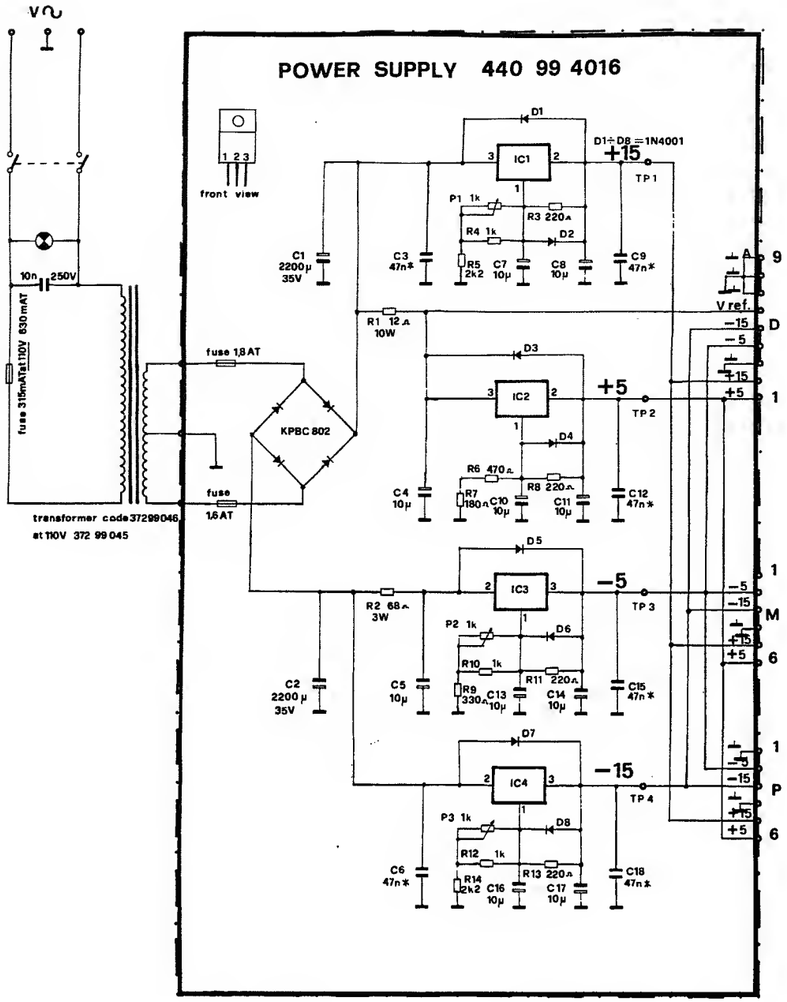

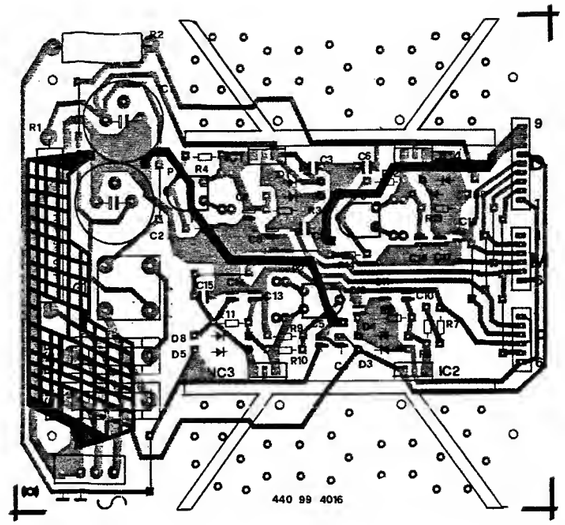

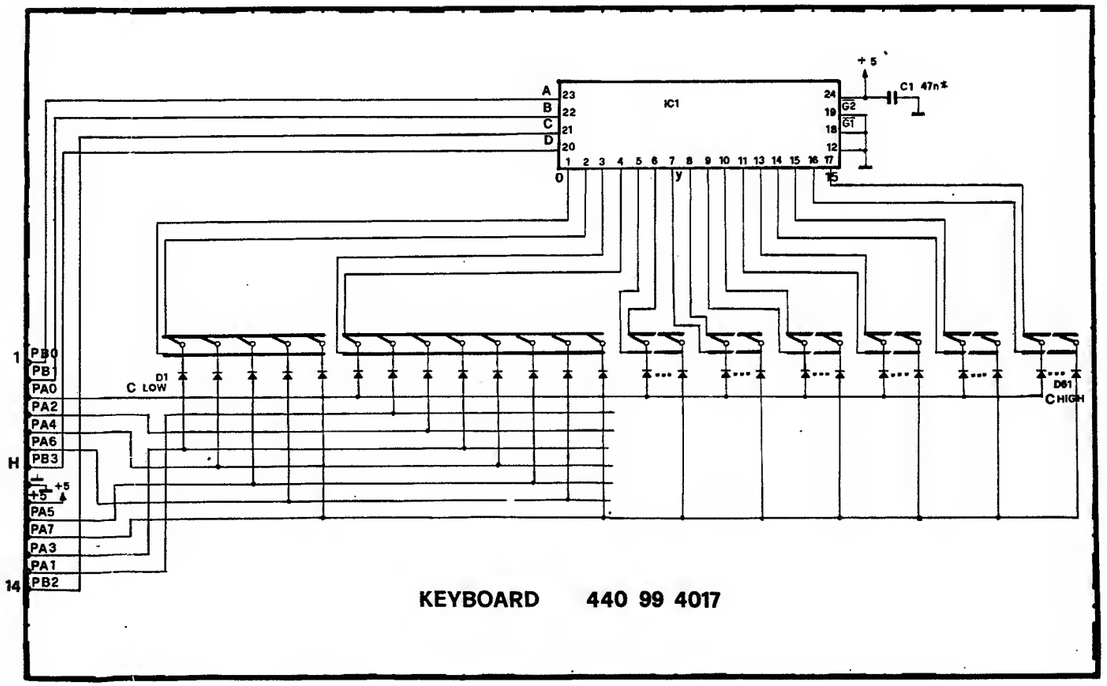

POWER SUPPLY		
I C 1-2	LM 317	367.99.8006
I C 3-4	LM 337	367.99.8005

KEYBOARD		
I C 1	74LS154	367.99.6503

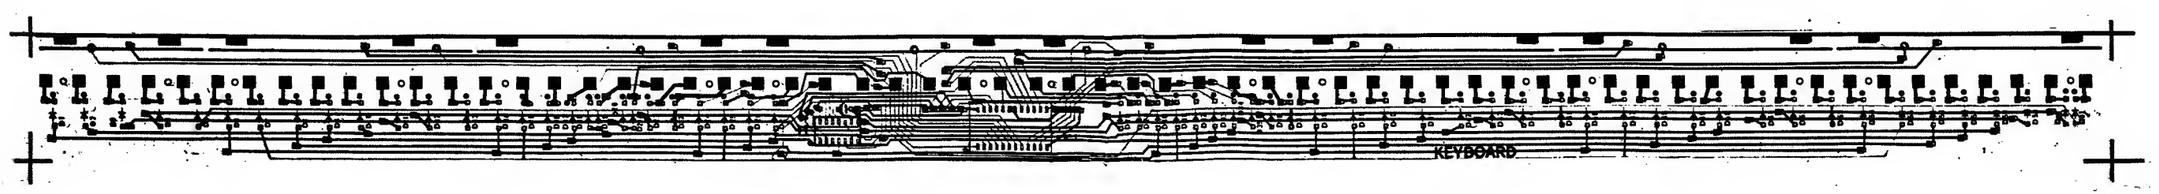

1 DISPLAY BOARD ASSY 590 05 0045
590 05 0050

2 D. C. O. BOARD (LEFT) ASSY 590 05 0047

3 ADSR BOARD (RIGHT) ASSY 590 05 0048

4 VOICES ASSY 590 06 0056

5 POWER SUPPLY ASSY 590 02 0017

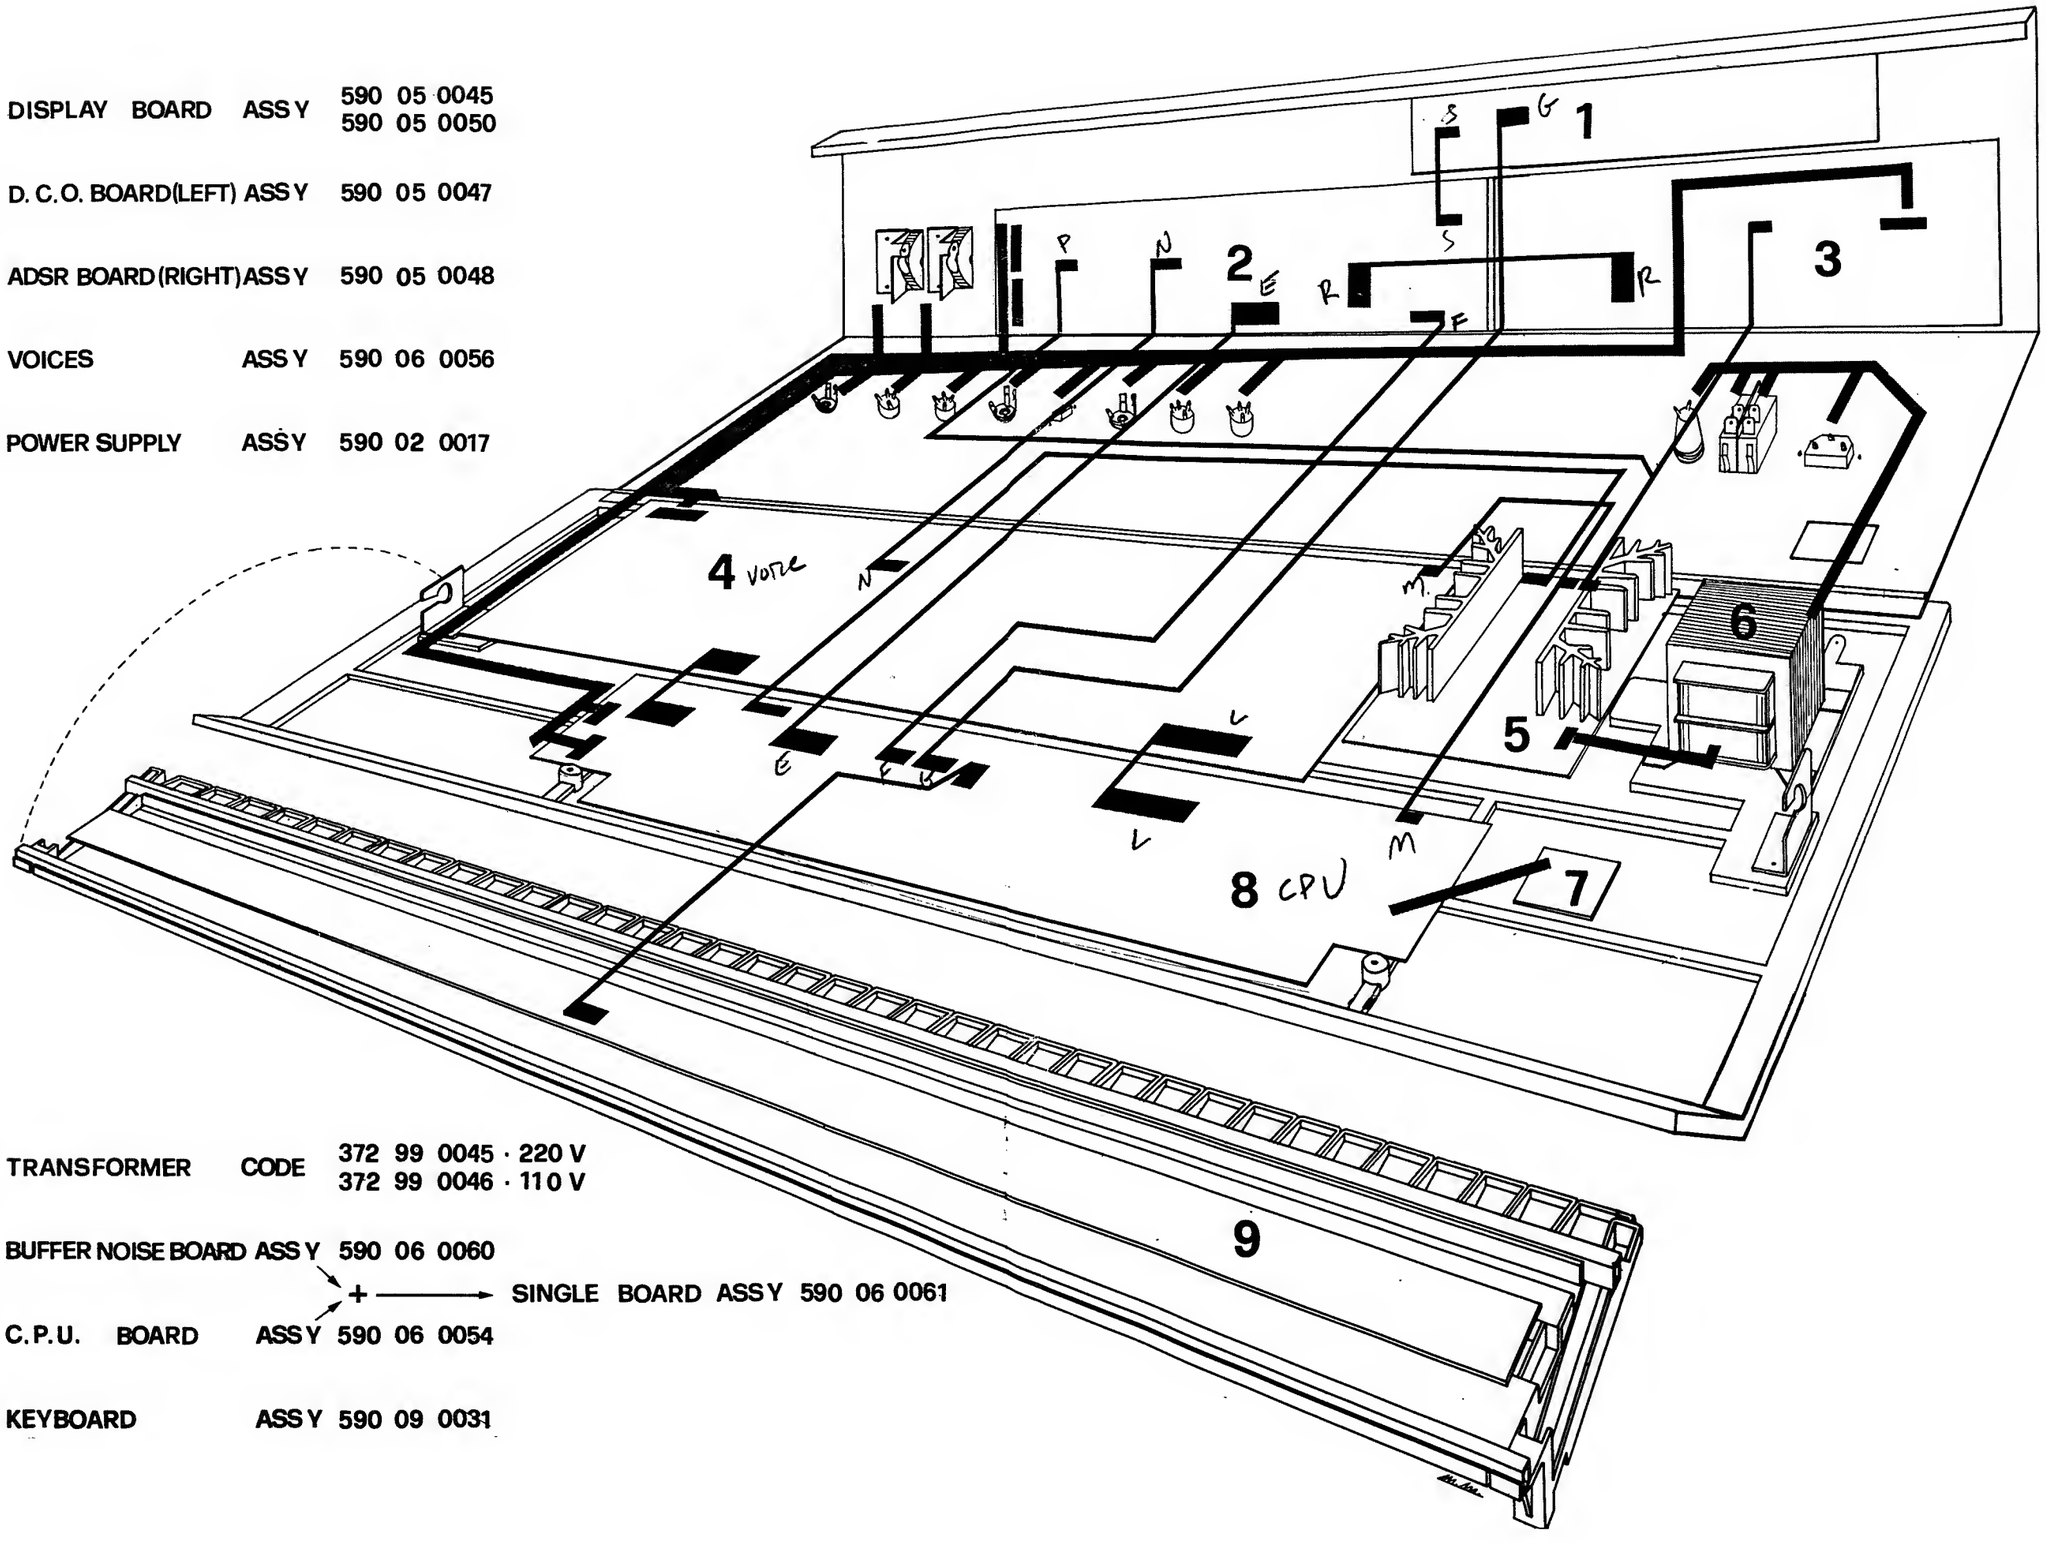

6 TRANSFORMER CODE 372 99 0045 · 220 V
372 99 0046 · 110 V

7 BUFFER NOISE BOARD ASSY 590 06 0060 + SINGLE BOARD ASSY 590 06 0061

8 C.P.U. BOARD ASSY 590 06 0054

9 KEYBOARD ASSY 590 09 0031

BACK PANEL ASSEMBLY

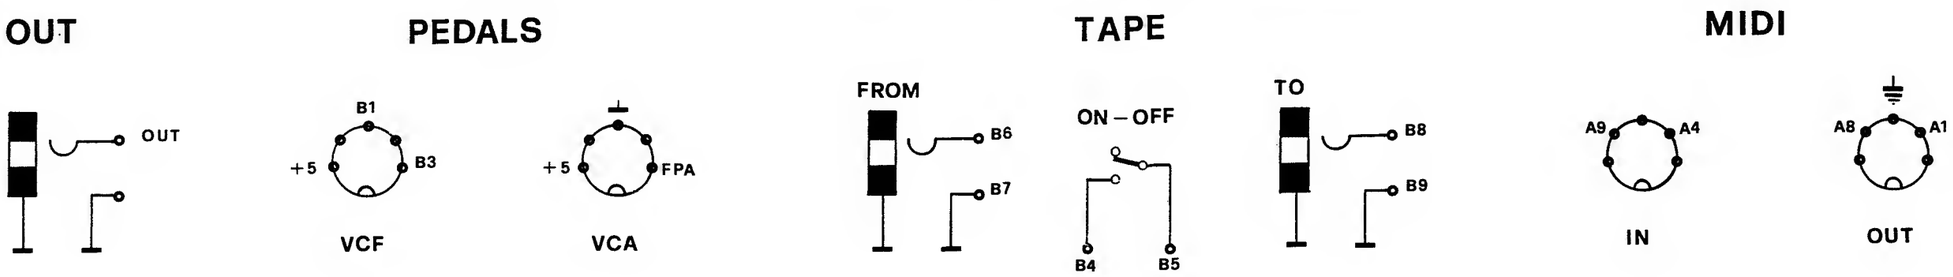

MIDI SECTION

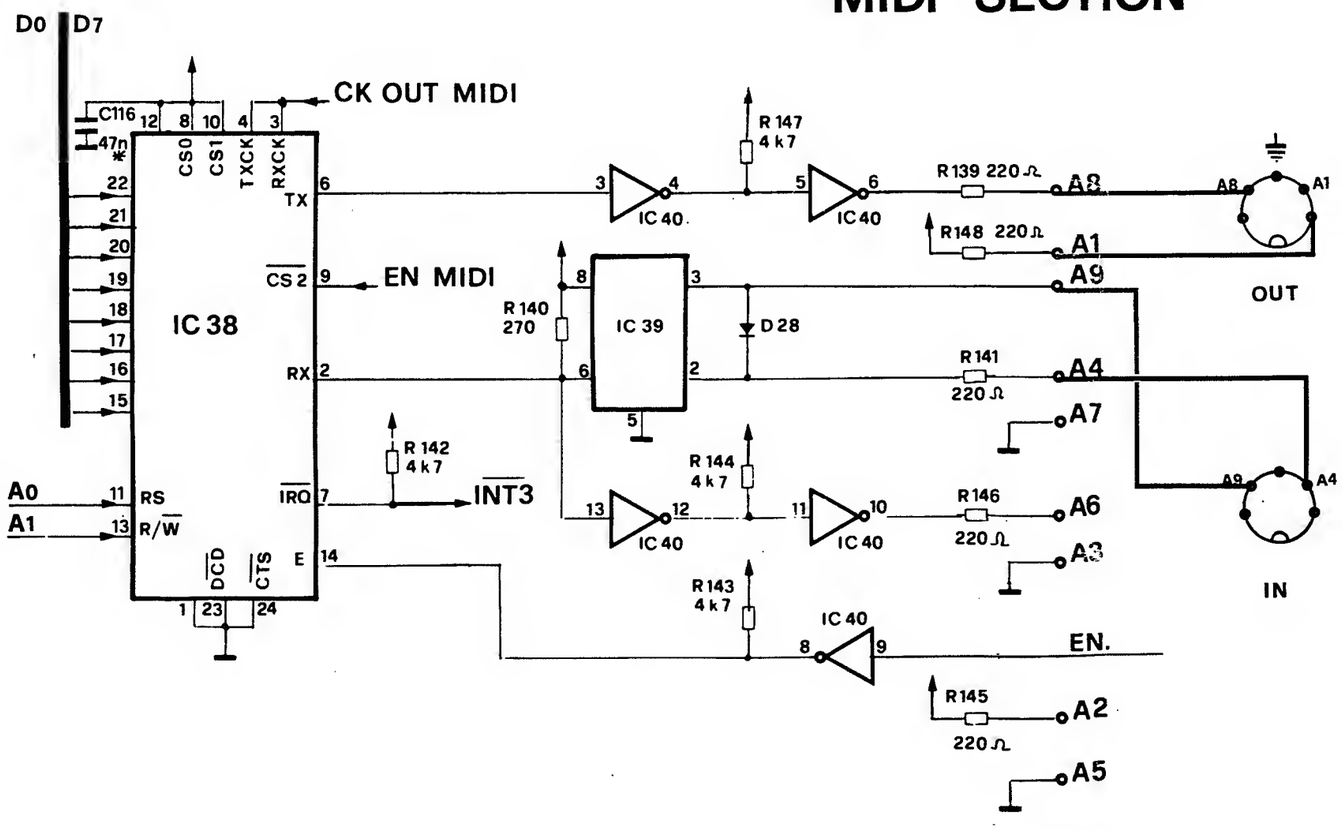

NOTE

Interconnect cables should not exceed fifty feet (15 meters), and must have a corresponding 5-pin DIN male plug (SWITCHCRAFT 05GM5M or equivalent.) The cable should be shielded twisted pair, with the shield connected to pin 2 at both ends. Notice that while the MIDI OUT jack is grounded to the instrument chassis, MIDI IN is not. This allows the cables to provide their shielding services without creating ground loops.

ADJUSTMENT

ADJUSTMENT SEQUENCE

1. Power Supply Trim
2. HFO A Tuning
3. Waveforms Gen. Amplitude Adjustment
4. VCA Gain Adjustment
5. HFO B Tuning
6. ADSR Time Adjustment
7. VCF Offset Adjustment

All adjustments must be made after the instrument's power has been on for at least five minutes.

POWER SUPPLY TRIM

1) Switch on the instrument.
2) Set DVM to TP1 (.4016) and adjust P1 to read +15.000 V
3) Set DVM to TP2 (.4016) and read +5V ±5%.
4) Set DVM to TP3 (.4016) and adjust P2 to read -5.000 V.
5) Set DVM to TP4 (.4016) and adjust P3 to read - 15.000 V.

Note: the supply must be fully loaded.

HFO A TUNING (.5009)

1) Press FREE, introduce saw-tooth A (L.E.D. WAVES), set CUTOFF to the max. and RESONANCE to the min.
2) Set MASTER TUNE to the center.
3) Press the second 'A'(from the right) and adjust P1 to obtain a 440 Hz frequency (use a diapason).

WAVEFORMS GEN. AMPLITUDE ADJUSTMENT (.5011)

1) Press FREE.
2) Connect oscilloscope to TP9.
3) Introduce saw-tooth A.
4) Press the second 'E' (from the right) and set the saw-tooth amplitude to +4.800 Vpp operating trimmer P3.
5) Press the first 'E' (from the left - three octaves lower than the former) and set amplitude to +4.800 Vpp operating trimmer P4.
6) Verify that the saw-tooth amplitude is +4.800 Vpp on the whole keyboard extension.
7) Connect oscilloscope to TP3.
8) Repeat point 4) operating P1.
9) Repeat point 5) operating P2.
10) Repeat point 6).
11) This adjustment is to be made for the 6 voices.

Adjustment Control

1) Connect oscilloscope to TP24.
2) Recall program 93.
3) Verify that the 6 voices' PW's are at 50%.

VCF CUTOFF AND RESONANCE ADJUSTMENT (.5011)

1) Recall program 91.
2) Connect oscilloscope to TP24.
3) Press any key and set the sine amplitude (any frequency), to 400 mVpp operating P5 of the voice indicated by the lit L.E.D.
4) Repeat point 3) for the 6 voices.
5) Set P8 to the center.
6) Connect freq.m. to TP24.
7) Press any key and set the sine frequency to 880 Hz operating P7 of the voice indicated by the lit L.E.D.
8) Repeat point 7 for the 6 voices.

ADSR TIME ADJUSTMENT (.5011)

1) Recall program 92.
2) Connect oscilloscope to pin 10 (IC 1) or to R7 of voice 1.
3) Press any key and set attack time to 5.800 seconds operating P10 of the voice indicated by the lit L.E.D.
4) Repeat point 3) for the 6 voices.

VCA GAIN ADJUSTMENT (.5011)

1) Press FREE.
2) Introduce saw-tooth A.
3) Set CUTOFF to the max.
4) Set RESONANCE to the min.
5) Connect oscilloscope to TP24.
6) Press middle 'C' and adjust P9 of the voice indicated by the lit L.E.D. to obtain a saw-tooth amplitude equal to 400 mVpp.

HFO B ADJUSTMENT (.5009)

1) Recall program 90.
2) Press any key and adjust P3 so as to eliminate the beat between HFO A and HFO B.

VCF OFFSET ADJUSTMENT (.5011)

1) Press FREE.
2) Set VCF CUTOFF to 3/4.
3) Set VCF RESONANCE to the min.
4) Connect DMM to TP24.
5) Without depressing any key, read voltage on DMM; e.g.:-1.34 mV.
6) Press any key and adjust P6 of the voice indicated by the lit L.E.D. so as to read the same voltage as per point 5) on the DMM.
7) Repeat point 6)for the 6 voices.

NOTES

- R* IMPLIES SPECIAL RESISTOR
- C* IMPLIES CERAMIC CAPACITOR
- ALL PNP TRANSISTORS ARE BC 560 part code 364.99.0004
- ALL NPN TRANSISTORS ARE BC 239 part code 364.99.0005
- ALL DIODES ARE 1N4148
- ALL RESISTORS ARE 1/4 WATT
- ALL ELECTROLYTIC CAPACITORS ARE 16 V DC UNLESS OTHERWISE INDICATED.

GENERATION SECTION P.C. 440 99 5009 OR 5010 (RIGHT)

UPWARD ARROW INDICATES +5 V

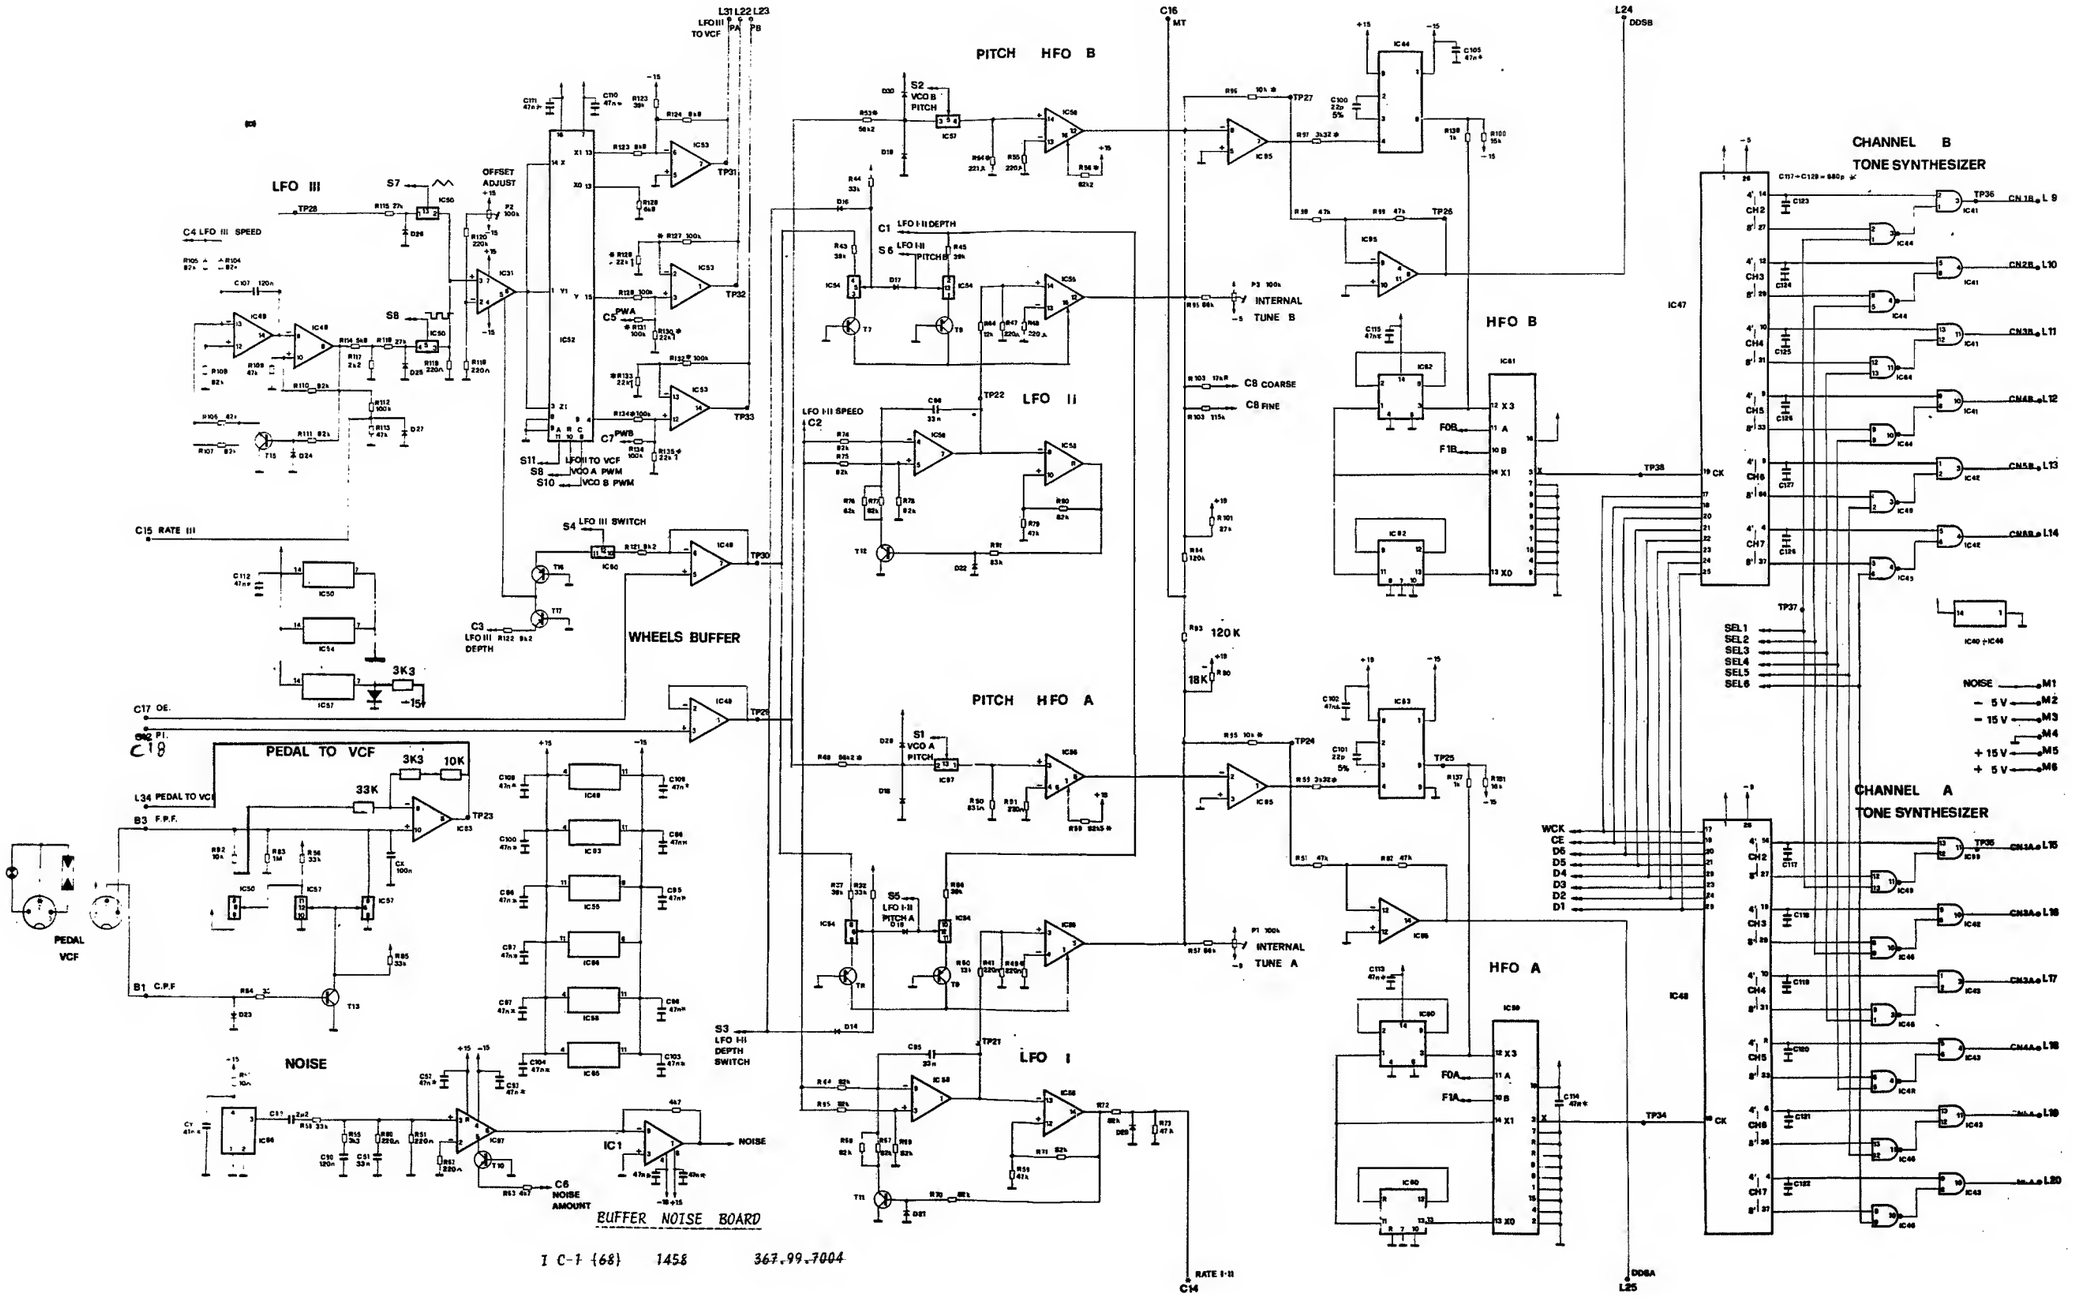

I C-1 (68) 1458 367.99.7004

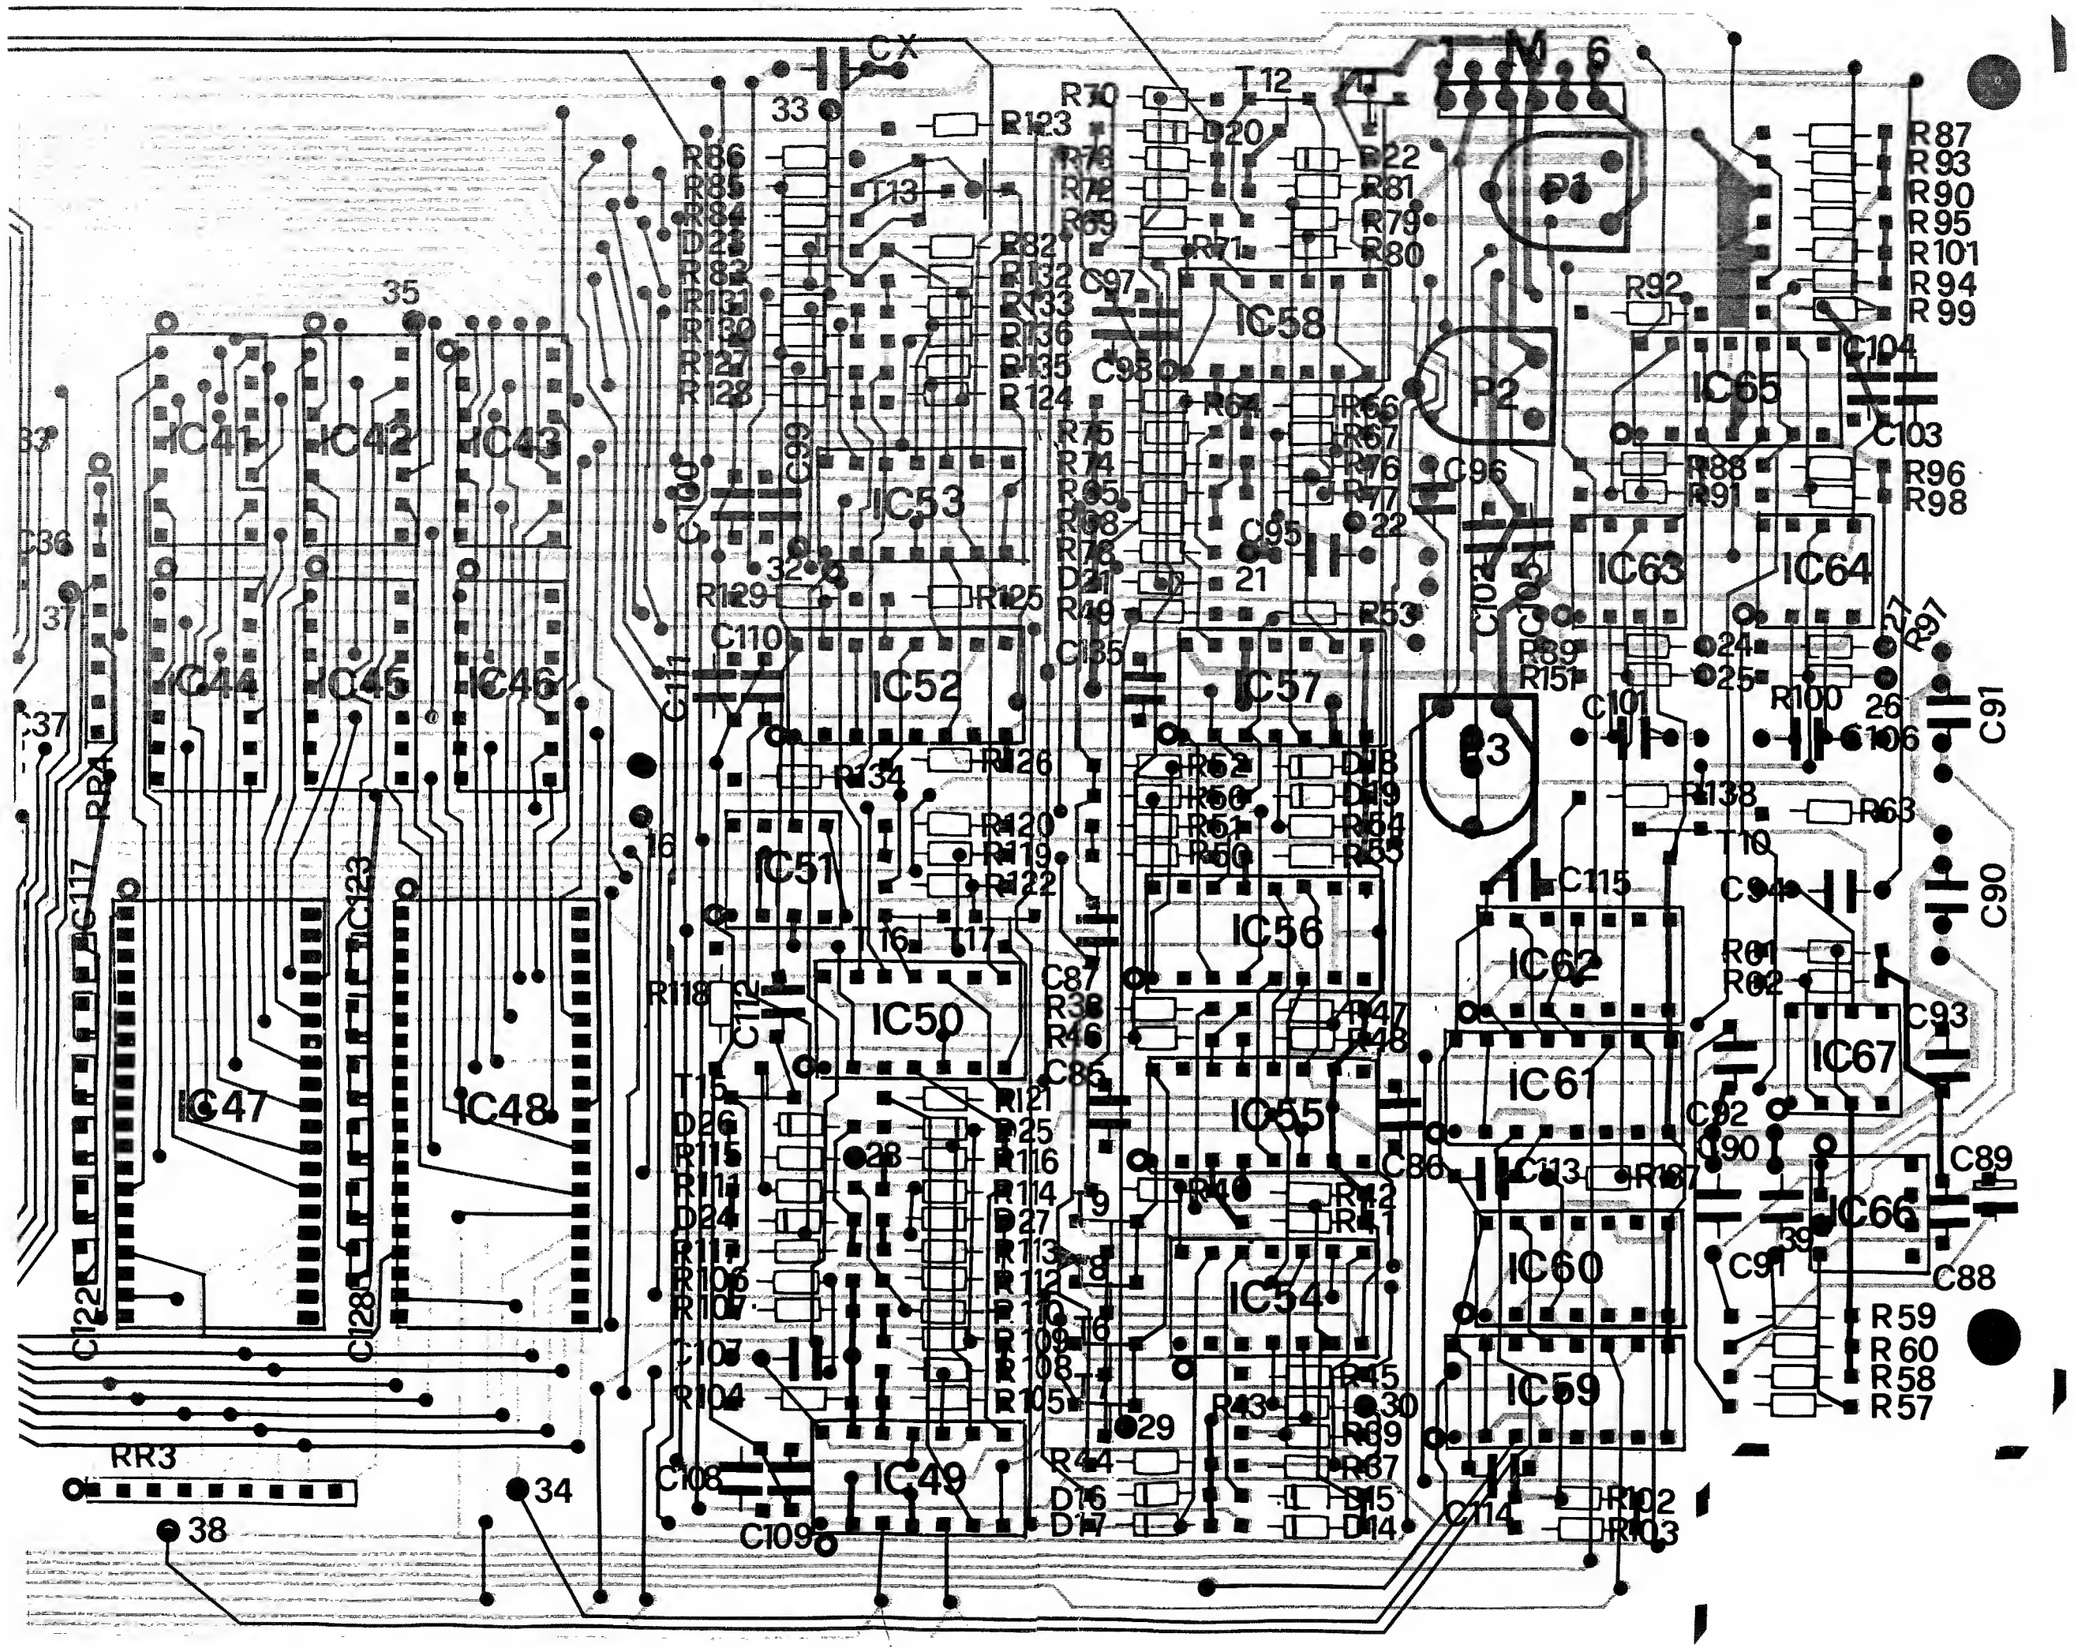
CX
M 6
P1
P2
P3
IC41
IC42
IC43
IC44
IC45
IC46
IC47
IC48
IC49
IC50
IC51
IC52
IC53
IC54
IC55
IC56
IC57
IC58
IC59
IC60
IC61
IC62
IC63
IC64
IC65
IC66
IC67
RR3
R87
R93
R90
R95
R101
R94
R99
R92
C104
C103
R96
R98
R97
C91
C90
C89
C88
R59
R60
R58
R57
C96
C95
C94
C93
C92
C86
C85
C84
C83
C82
C81
C80
C79
C78
C77
C76
C75
C74
C73
C72
C71
C70
C69
C68
C67
C66
C65
C64
C63
C62
C61
C60
C59
C58
C57
C56
C55
C54
C53
C52
C51
C50
C49
C48
C47
C46
C45
C44
C43
C42
C41
C40
C39
C38
C37
C36
C35
C34
C33
C32
C31
C30
C29
C28
C27
C26
C25
C24
C23
C22
C21
C20
C19
C18
C17
C16
C15
C14
C13
C12
C11
C10
C9
C8
C7
C6
C5
C4
C3
C2
C1
R1
R2
R3
R4
R5
R6
R7
R8
R9
R10
R11
R12
R13
R14
R15
R16
R17
R18
R19
R20
R21
R22
R23
R24
R25
R26
R27
R28
R29
R30
R31
R32
R33
R34
R35
R36
R37
R38
R39
R40
R41
R42
R43
R44
R45
R46
R47
R48
R49
R50
R51
R52
R53
R54
R55
R56
R57
R58
R59
R60
R61
R62
R63
R64
R65
R66
R67
R68
R69
R70
R71
R72
R73
R74
R75
R76
R77
R78
R79
R80
R81
R82
R83
R84
R85
R86
R87
R88
R89
R90
R91
R92
R93
R94
R95
R96
R97
R98
R99
R100
R101
R102
R103
R104
R105
R106
R107
R108
R109
R110
R111
R112
R113
R114
R115
R116
R117
R118
R119
R120
R121
R122
R123
R124
R125
R126
R127
R128
R129
R130
R131
R132
R133
R134
R135
R136
R137
R138
R139
R140
R141
R142
R143
R144
R145
R146
R147
R148
R149
R150
R151
T1
T2
T3
T4
T5
T6
T7
T8
T9
T10
T11
T12
T13
T14
T15
T16
T17
D1
D2
D3
D4
D5
D6
D7
D8
D9
D10
D11
D12
D13
D14
D15
D16
D17
D18
D19
D20
D21
D22
D23
D24
D25
D26
D27
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39

WAVEFORMS GENERATOR B

WAVEFORMS GENERATOR A

VOICE 1÷6

VCF

VCA

ADSR

I C 1	SSM 2056	367.99.7018
I C 2	SSM 2044	367.99.7017
I C 3-7-11-14-8	TL 082	367.99.7009
I C 4-6-12	4016	367.99.6004
I C 5	SSM 2024	367.99.7019
I C 9	3046	367.99.7007
I C 10	LM393	367.99.7011

= −15

UPWARD ARROW INDICATES + 15 V

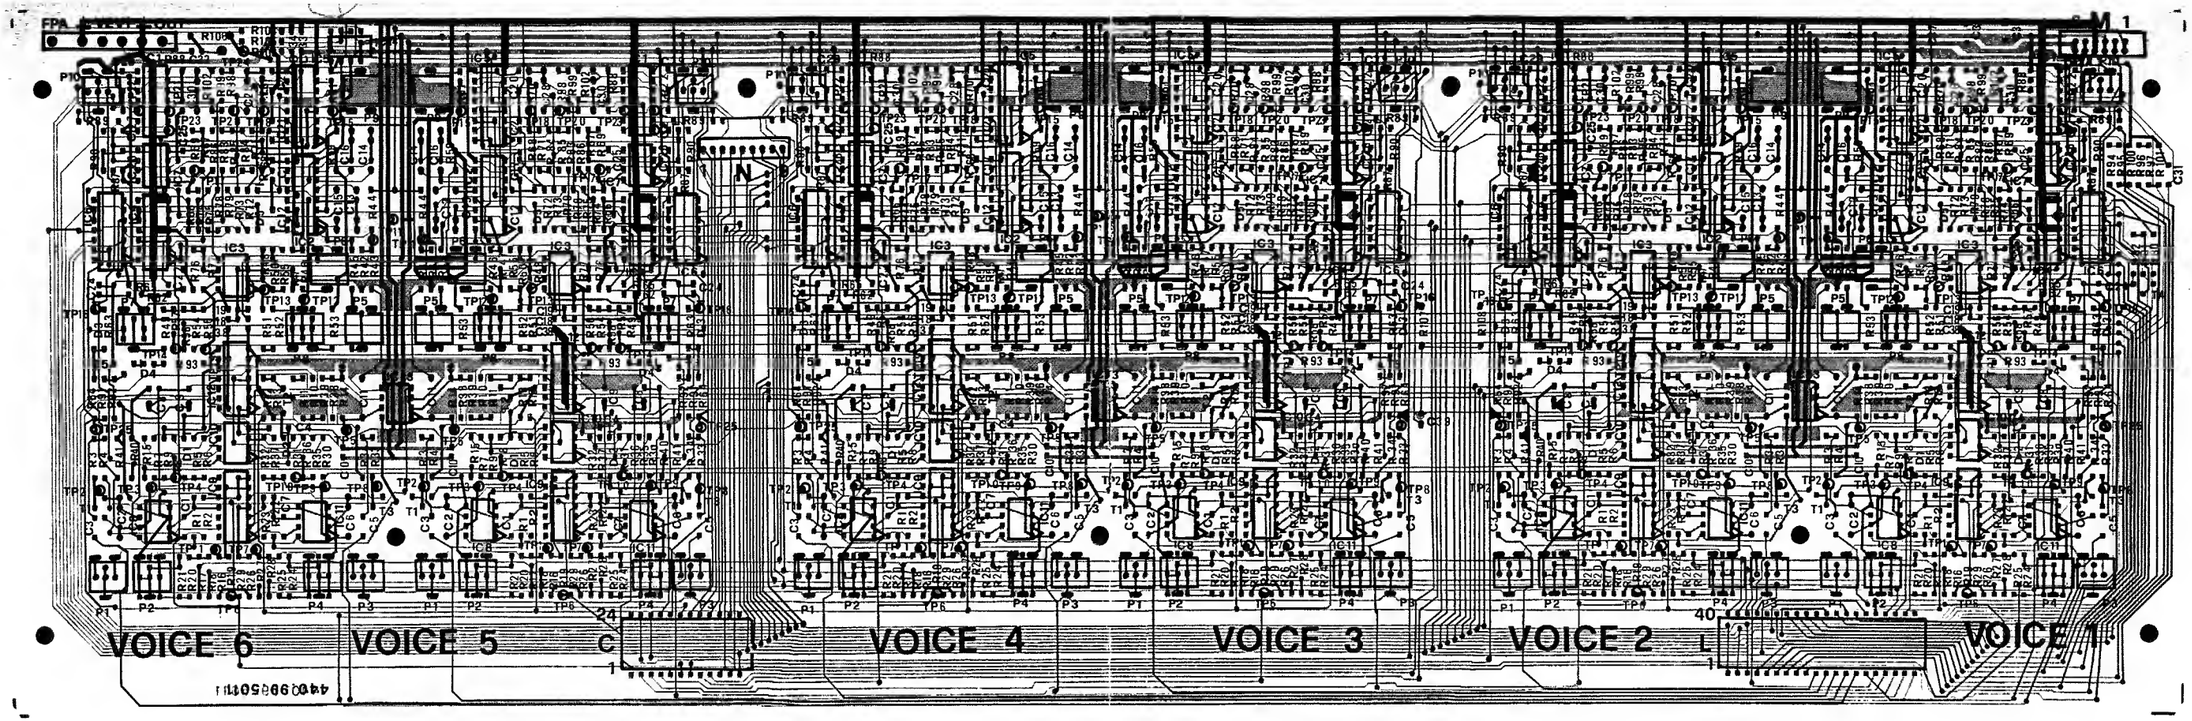
VOICE 6
VOICE 5
VOICE 4
VOICE 3
VOICE 2
VOICE 1

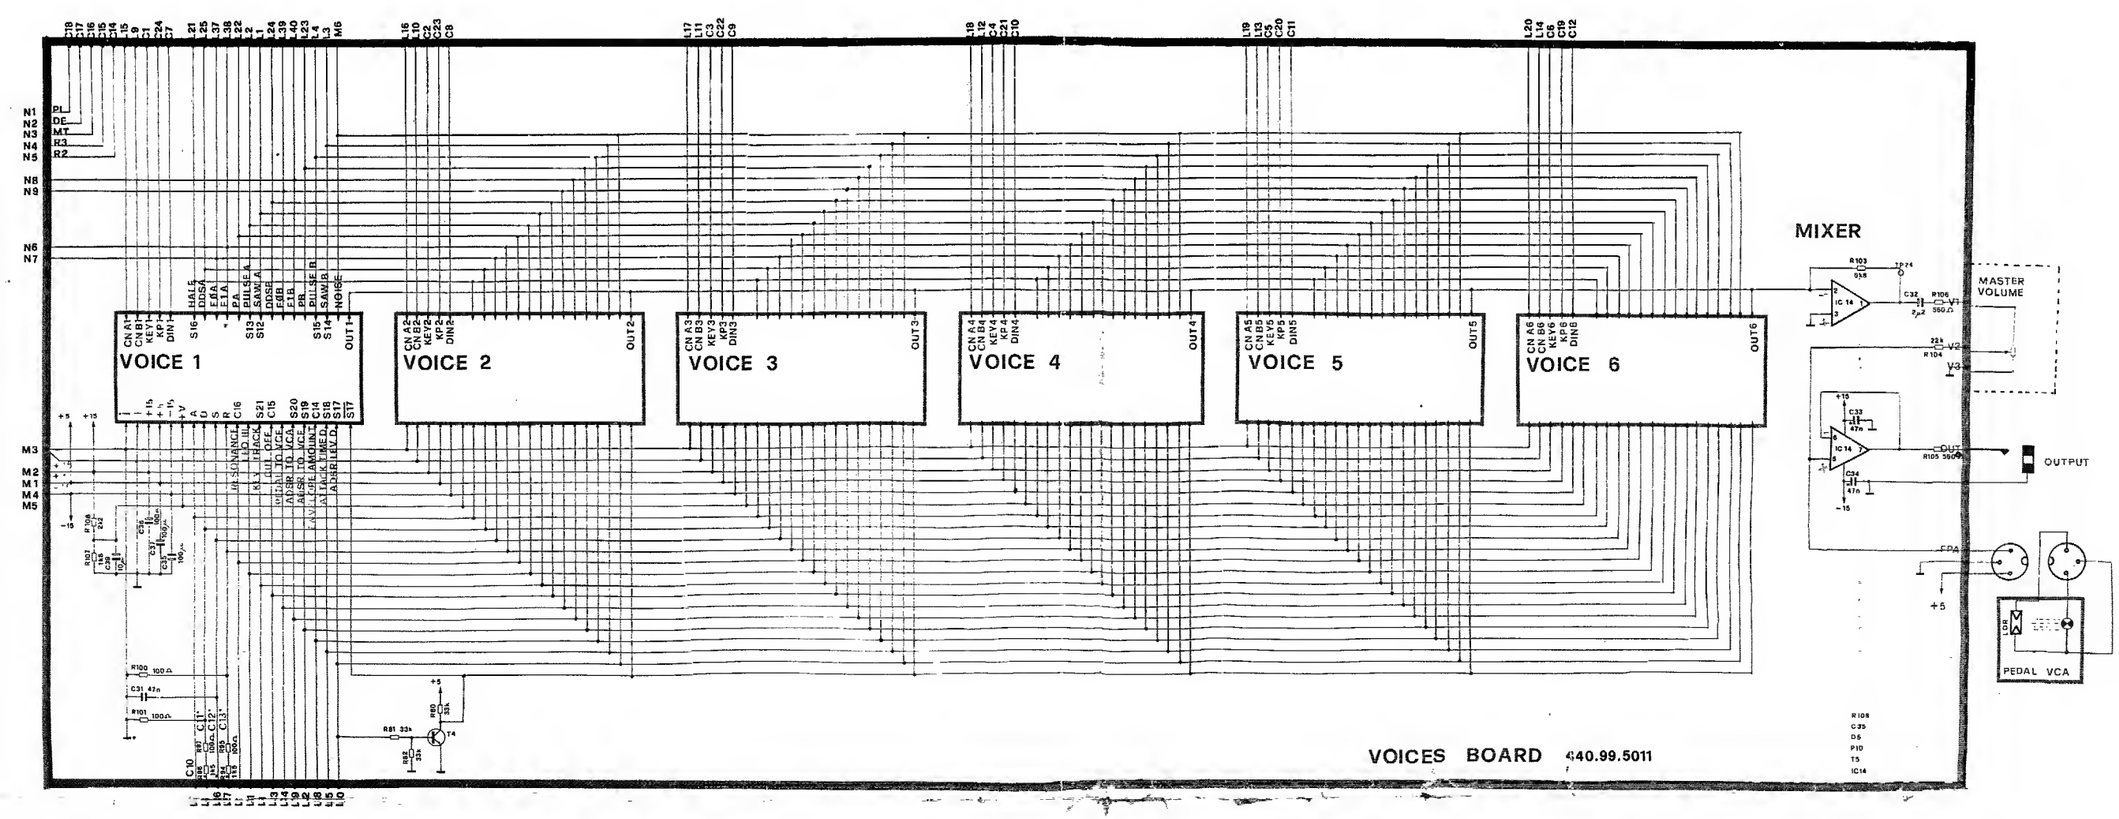
VOICE 1
VOICE 2
VOICE 3
VOICE 4
VOICE 5
VOICE 6
MIXER
MASTER VOLUME
OUTPUT
PEDAL VCA
VOICES BOARD 4140.99.5011

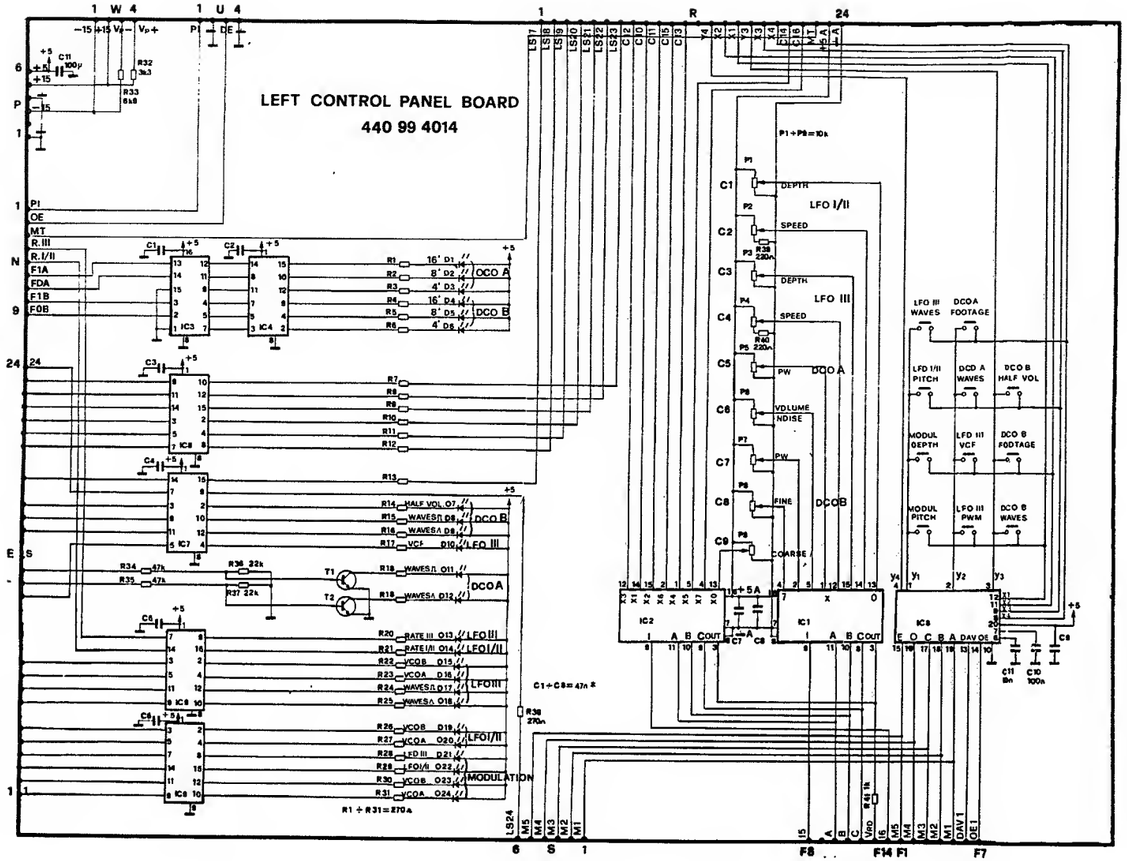

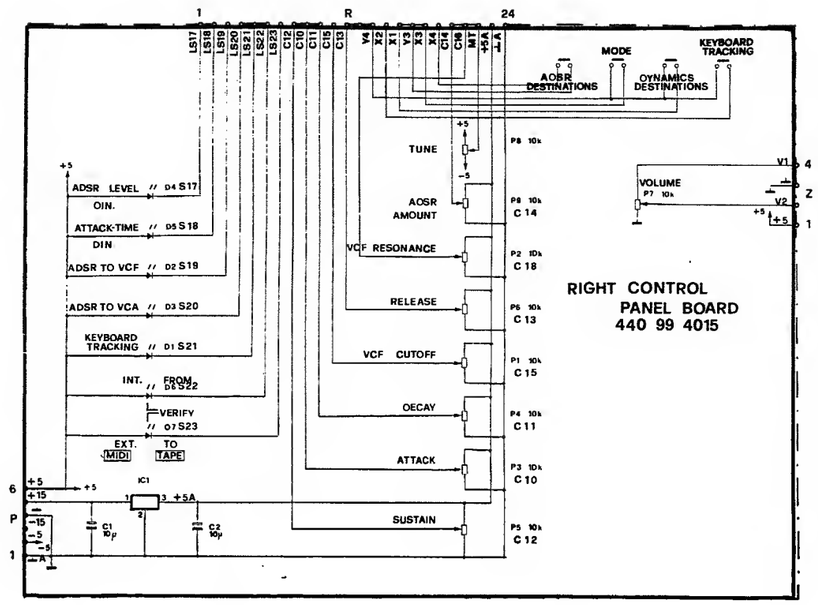

LEFT CONTROL PANEL D.C.O.		
I C 1-2	4051	367.99.6013
I C 3	4555	367.99.6036
I C 4÷8	4049	367.99.6012
I C 9	74C923	367.99.6035

RIGHT CONTROL PANEL A.D.S.R.		
I C 1	7805	367.99.8009

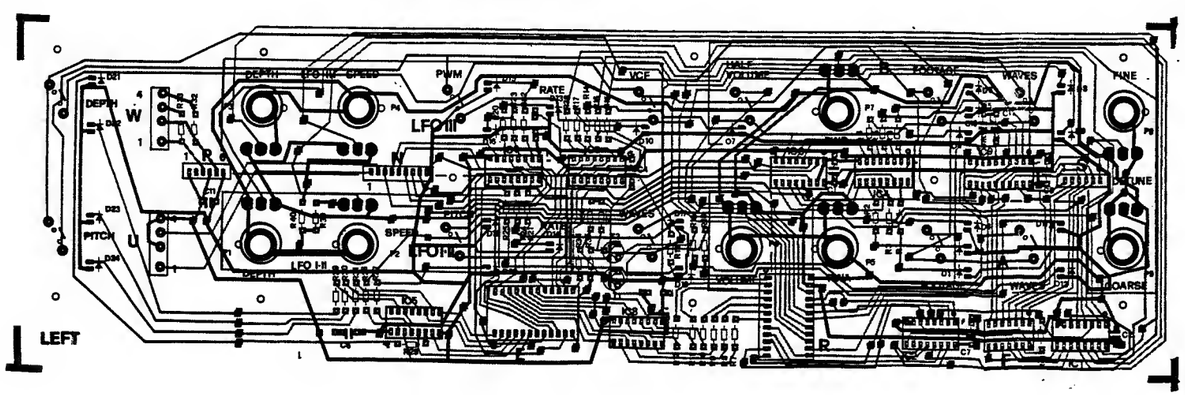

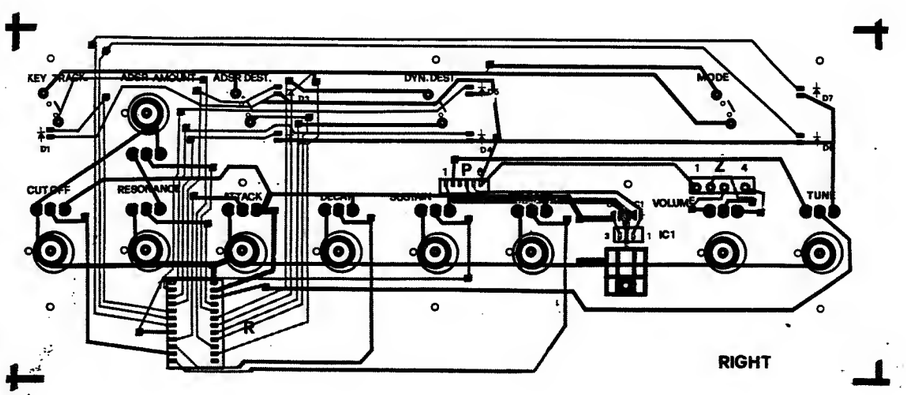

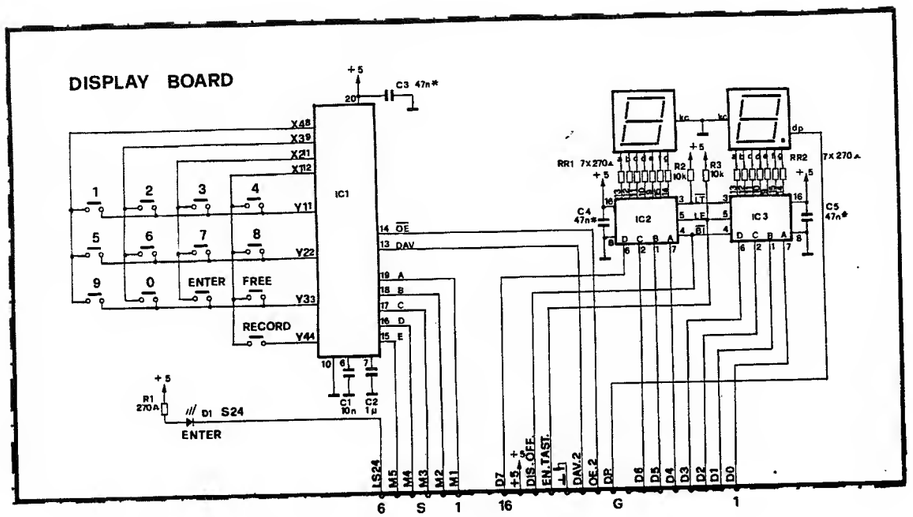

DISPLAY BOARD		
I C 1	74C923	367.99.6035
I C 2-3	4511	367.99.6027
DISPLAY	MAN 4740	361.99.9001

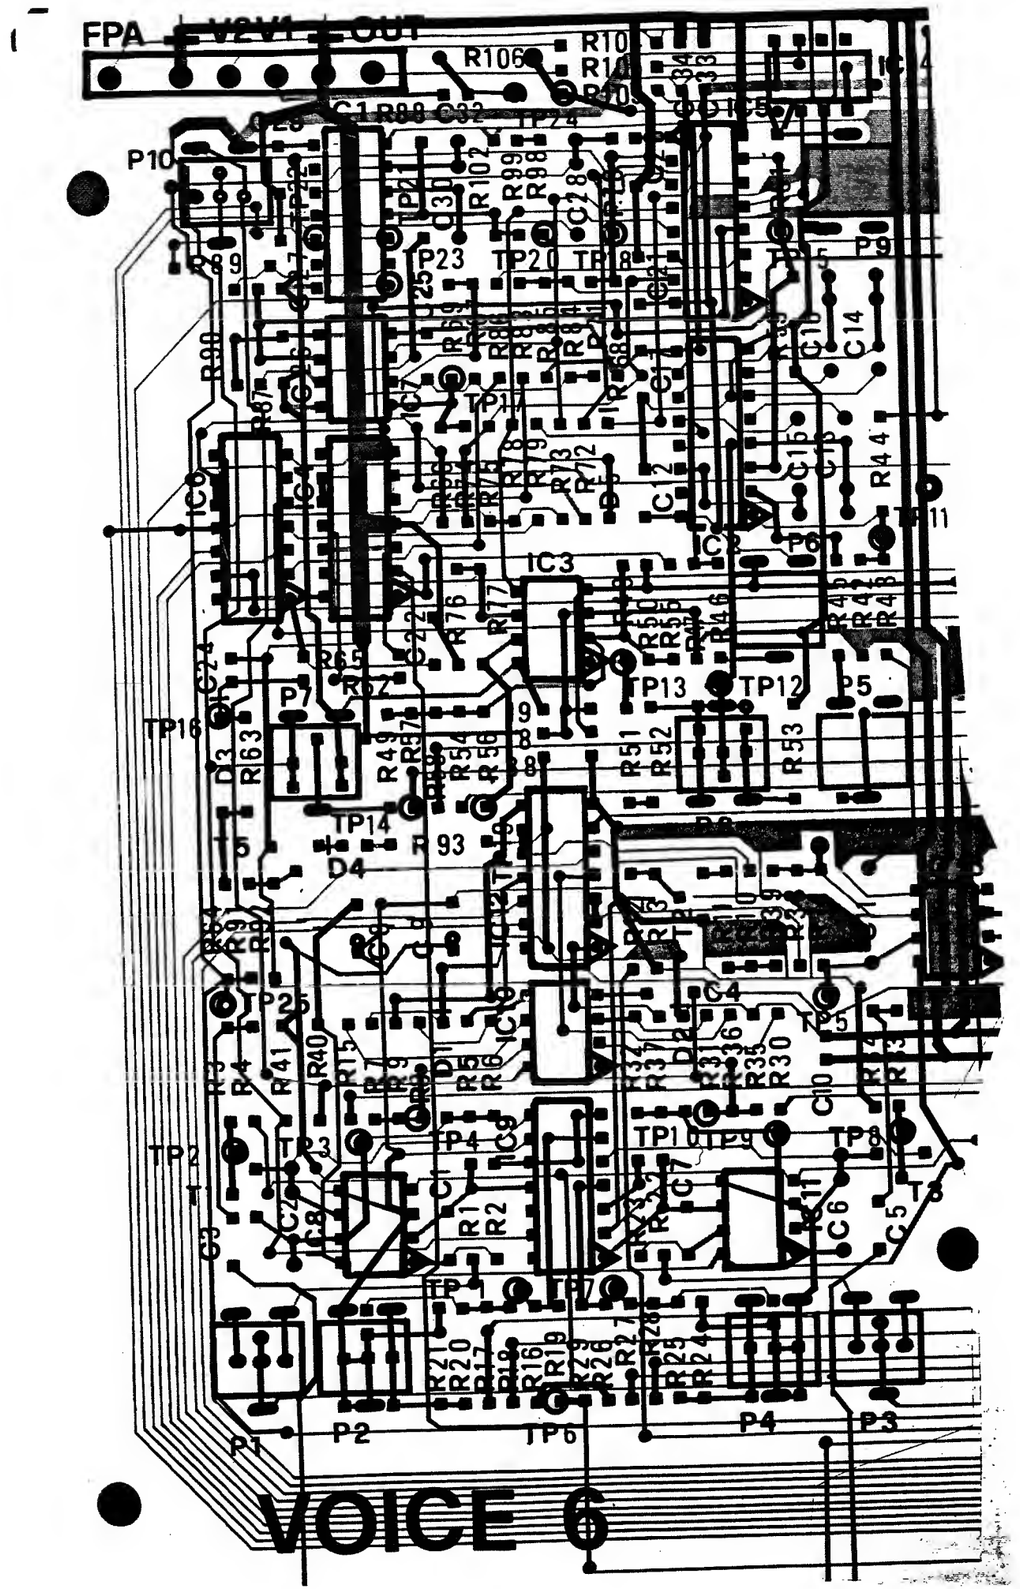

CPU SECTION P. C. 440 99 5009 OR 5010 (LEFT)

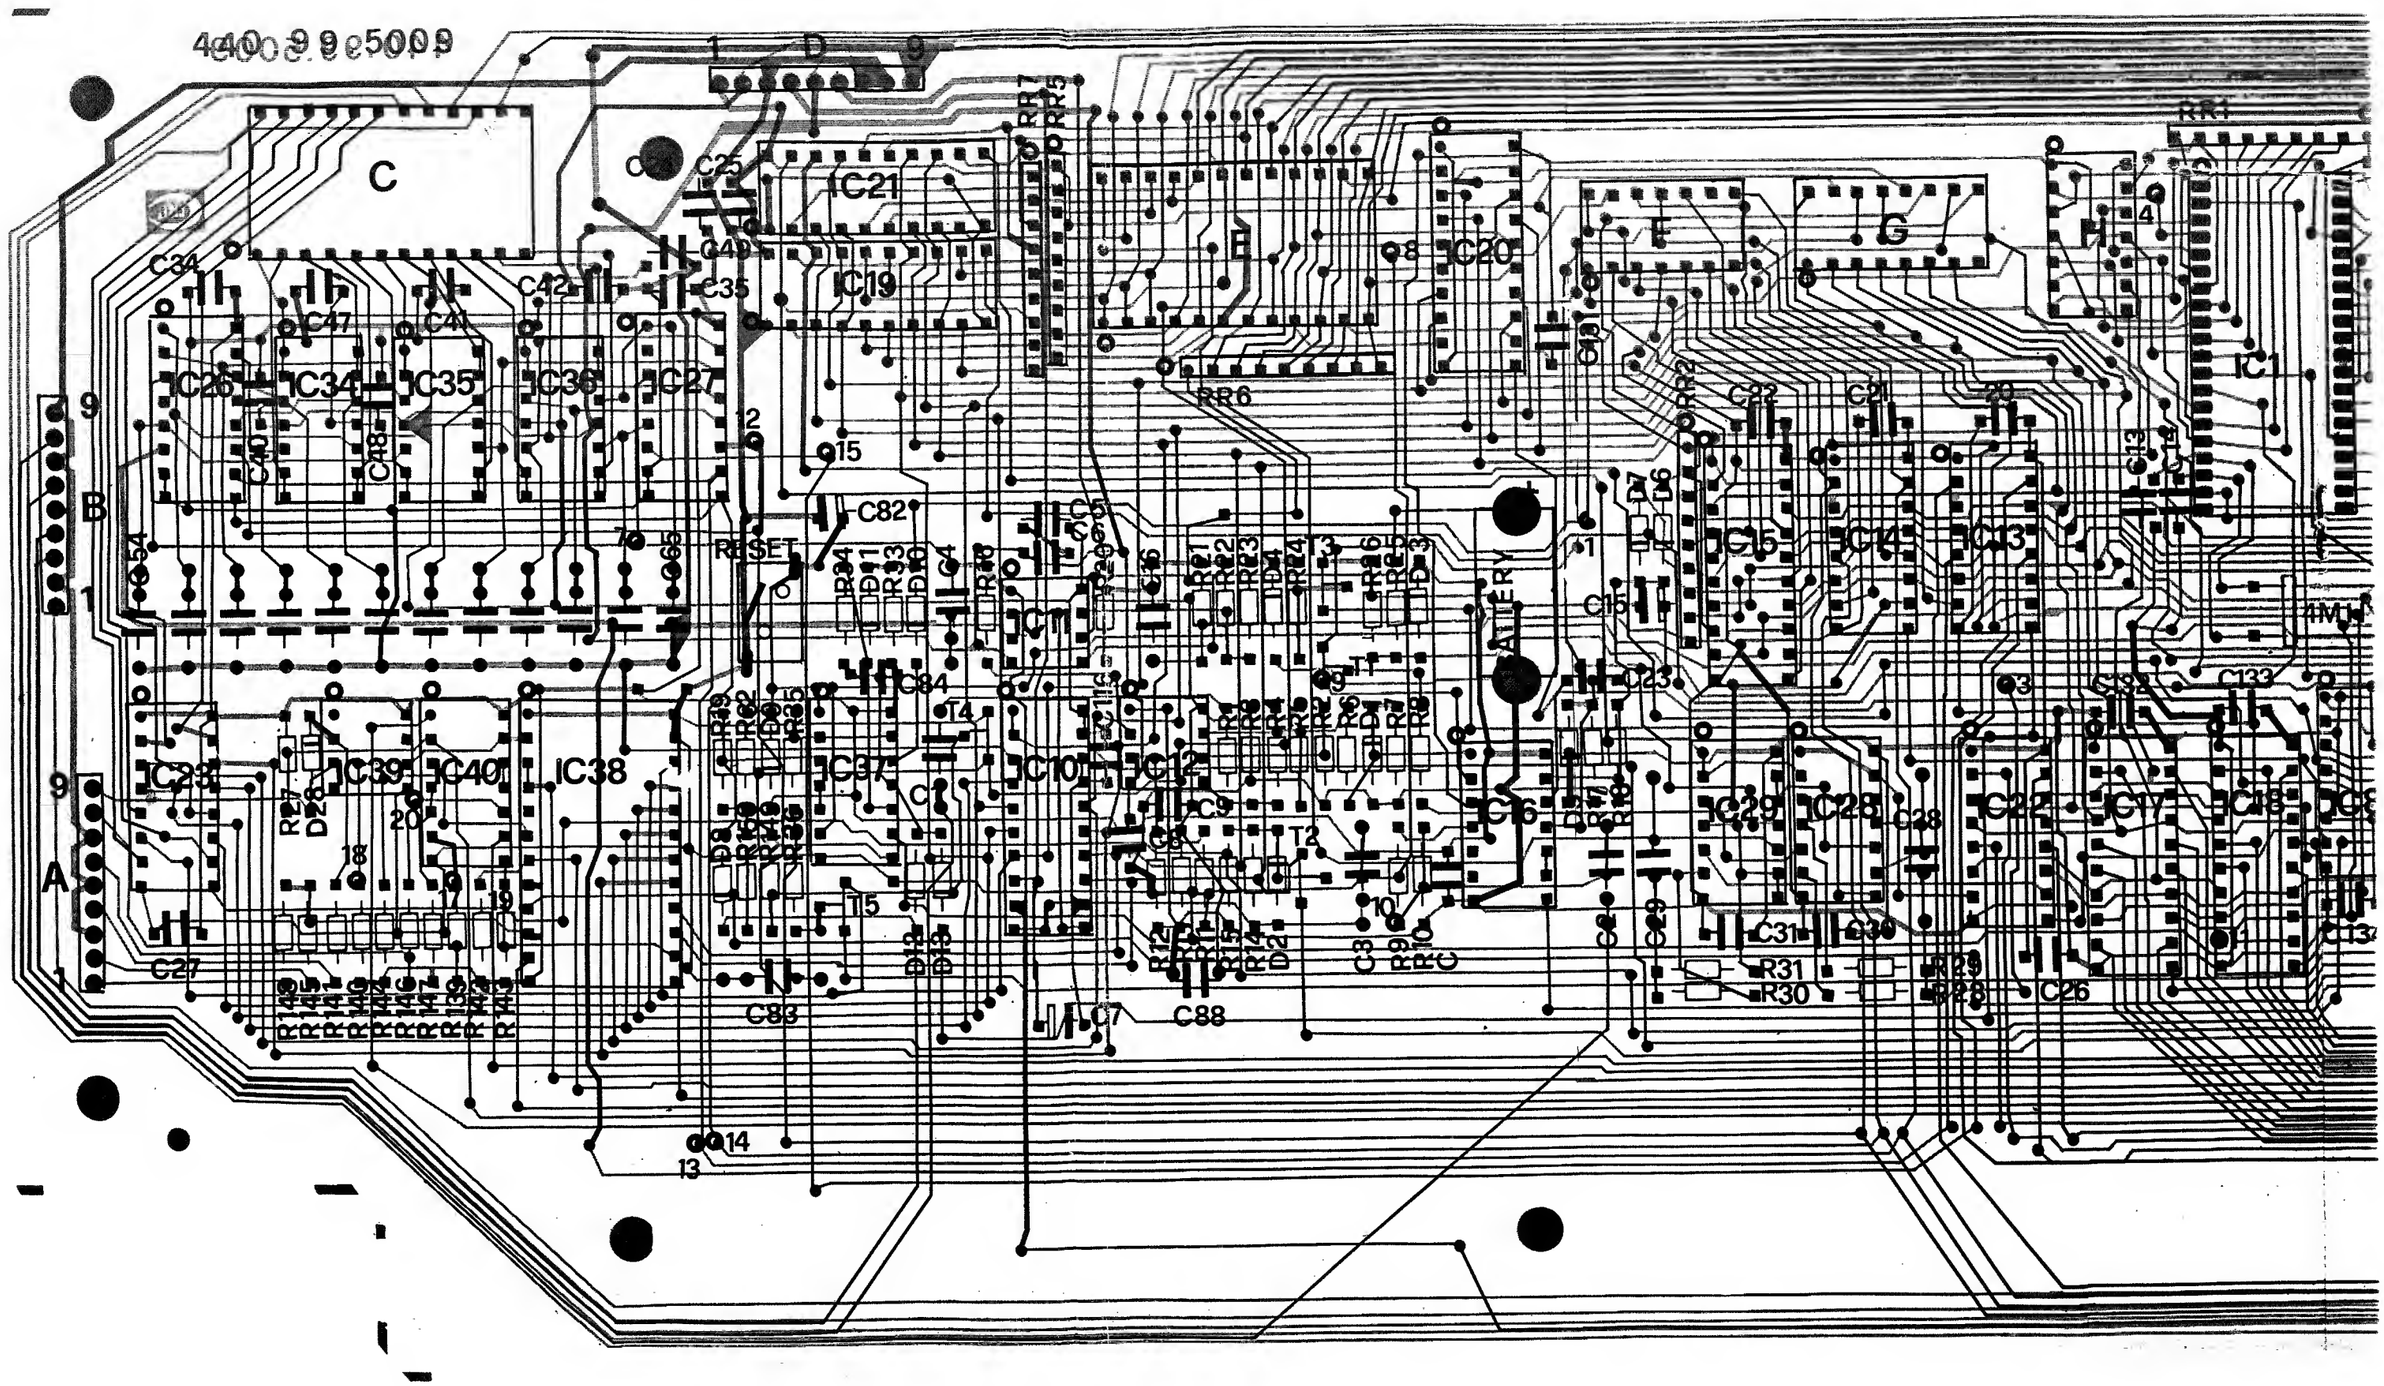

9 5009 OR 5010 (LEFT)

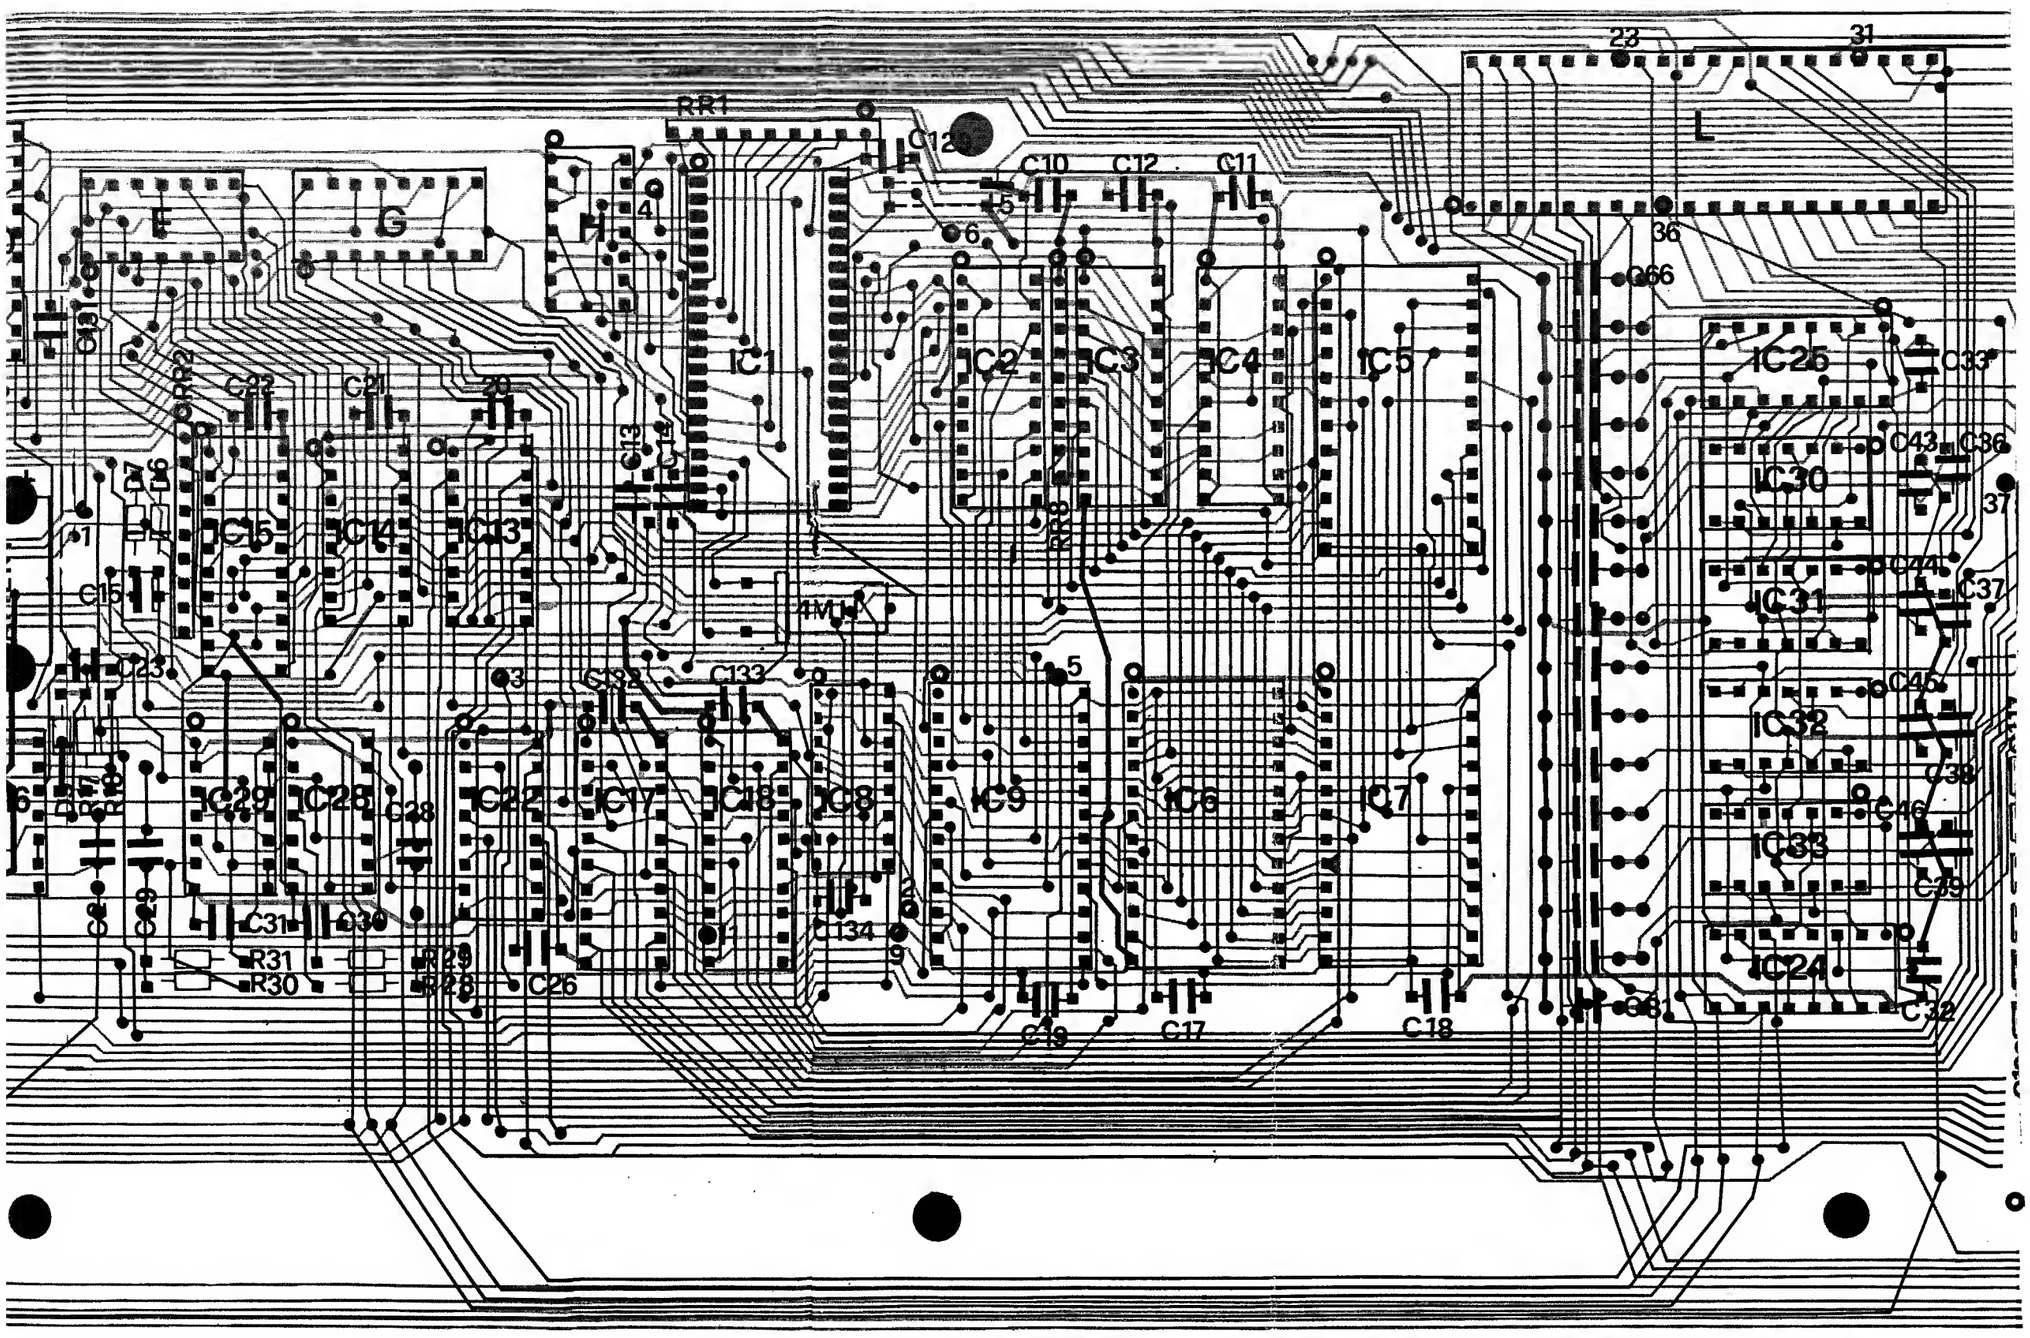

THIS SCHEMATIC SHOWS
CONTENT OF EACH OF THE
FOLLOWING BLOCKS.

TAPE OUT
CPU
CLOCK
RESET
RAM
EN RAM (Pin14, IC9)
POWER DETECTOR
BACK UP BATTERY
ROM 1
ROM 2
EN ROM 1
EN ROM 2
DAC
MIDI
TAPE COMPARATOR
MEMORY DECODER
PORT DECODER
PORT OUT
PORT IN
DIS.LAMP
DIS.OFF.
LED ENTER LAMP
DECIMAL POINT
FOR EXTERNAL CONNECTION SEE MIDI SECTION WITH RELATIVE NOTE
↑ = +5

THIS SCHEMATIC SHOWS CONTENT OF EACH OF THE FOLLOWING BLOCKS.

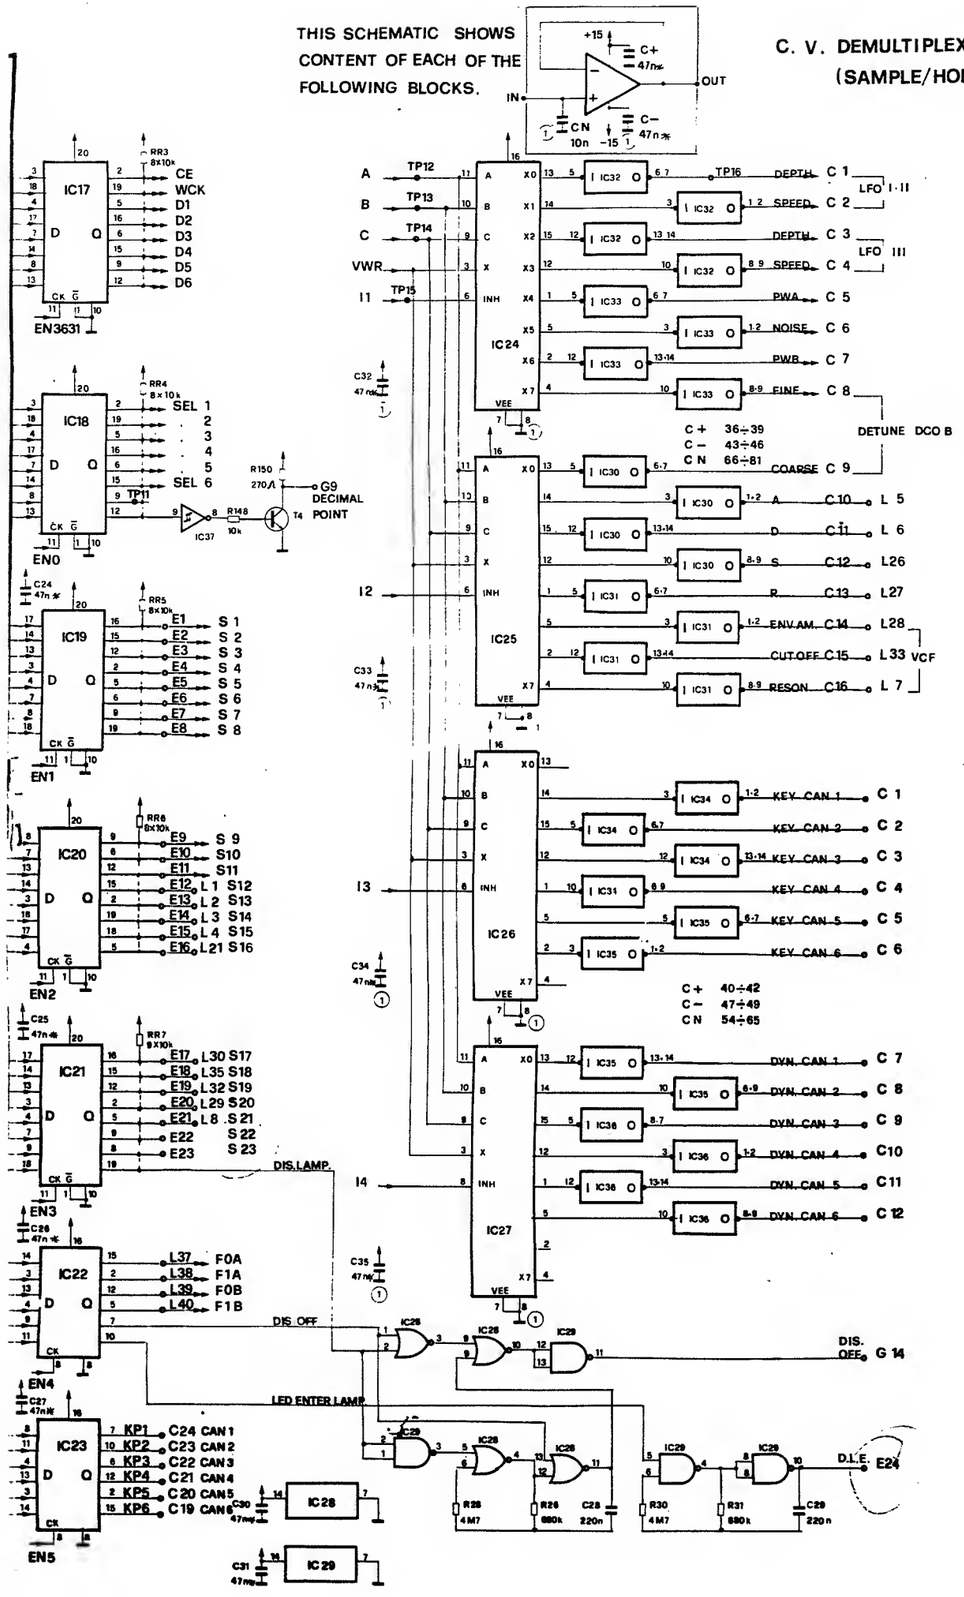

C.P.U BOARD

I C 1	TMS 7000	367.99.4904
I C 2-15	74LS244	367.99.6510
I C 3	74LS245	367.99.6507
I C 4	74LS373	367.99.6508
I C 5	6116	367.99.4003
I C 6-7	2532	367.99.4802
I C 8	74LS138	367.99.6504
I C 9	74LS154	367.99.6503
I C 10	DAC0831	367.99.7022
I C 11	TL082	367.99.7009
I C 12	LM393	367.99.7011
I C 13-14-22-23	74C174	367.99.6034
I C 16-37	40106	367.99.6029
I C 17÷21	74LS377	367.99.6509
I C 24÷27 59-61	4051	367.99.6013
I C 28	4001	367.99.6001
I C 29-44÷46	4011	367.99.6002
I C 30÷36 49-53-58-65	TL084	367.99.7021
I C 38	68B50	367.99.5024
I C 39	6N138	361.99.9501
I C 40	SN 7406	367.99.6301
I C 41÷43	4081	367.99.6006
I C 47-48	RI104	367.99.5021
I C 50-54-57	4016	367.99.6004
I C 51-67	3080	367.99.7006
I C 52	4053	367.99.6031
I C 55-56	13700	367.99.7005
I C 60-62	4013	367.99.6003